



Box Contents

- (1) SmartControl 2 (SSC-W002G-00)
- (1) Installation Kit SmartControl 2 (075-0174-xx)
 - (1) Mounting Plate (074-0569-xx)
 - (1) 6-pin Screw Down Plug-in Connector (028-9352-xx)
 - (1) 5V DC 1.2A Power Supply (025-0165-xx)
 - (1) Cable Tie (014-0071-xx)
- (1) Quick Reference Guide (this document)

Specifications

Environmental	
Temperature	32° to 104° F (0° to 40° C)
Humidity	10% to 80% RH (non-condensing)
Dimensions and Weight	
Height	0.64 in (1.62 cm)
Width	2.70 in (6.85 cm)
Depth	2.67 in (6.78 cm)
Weight	Net: 0.25 lb (0.11 kg) Shipping: 1.50 lb (0.68 kg)
Power	
Input Power	5V DC 1.2A
Max Power	6 watts
Standards	
Wireless	Wi-Fi (802.11 b/g/n 2.4 GHz)
Security	WPA1™, WPA2™, WPA1™ + WPA2™, WEP
Regulatory	
Safety and Emissions	FCC Part 15 CE Mark C-Tick
Contains FCC ID:	TLZ-CU277
Contains IC:	6100-CU277
RoHS	Compliant
Minimum Supported Release	
Savant OS	da Vinci 7.0

Network Requirements

Savant requires the use of a wireless network that is configured to make use of at least one of the supported wireless Standards listed in the Specifications Table.

Connect all Savant devices to the same local area network (LAN) or subnet as the host. Savant recommends not implementing any type of traffic or packet shaping in your network topology for the Savant devices as this may interfere with performance.

Network Configuration


To ensure that the IP Address will not change due to a power outage, a static IP Address or DHCP reservation should be configured. Savant recommends using DHCP reservation within the router. By using this method, static IP Addresses for all devices can be managed from a single UI avoiding the need to access devices individually.

Setting DHCP reservation varies from router to router. Refer to the documentation for the router to configure DHCP reservation.

Connecting to a Wireless Network

Refer to the SmartControl 2 (SSC-W002G) Deployment Guide located on the **Savant Customer Community** to connect the SSC-W002G to the network.

Front Panel

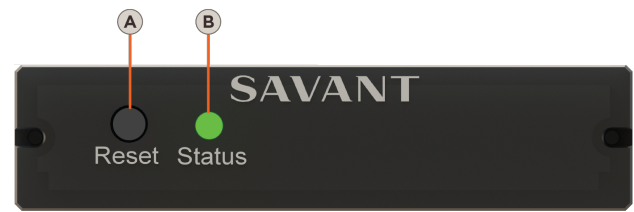


- A** Press and hold for 5 seconds while powered On to clear network settings. **Status** LED will blink rapidly when reset is complete.


Off: No Power

On Solid: Connected/Communicating with the Savant host.


Blinks Once: In Access Point Provisioning Mode and is ready to be provisioned onto the local network.




Blinks Twice: Is connecting to the local network.




- B** **Blinks Three Times:** Is connecting to the host.




Short Off Blink: Firmware is updating.



Rapid Blink: The reset button was held down for at least five seconds and the SSC-W002G is performing a factory reset.



Rear Panel

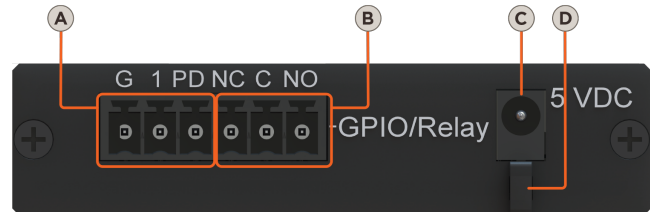


GPIO (General Purpose Input and Output Ports)
6-pin Screw Down Plug-in Connector (Left 3 Pins).
See [GPIO and Relay Wiring](#) for pinouts.

- A** **GPIO Input** When configured as an input, the processor will look for a low (<0.8V DC) or high (>2.4V DC) state.
Minimum 0V DC / Maximum 12V DC
- GPIO Output** When configured as an output, the port provides a binary output of 0-12V DC 150mA max.
- Normally Open / Normally Closed - Relays
6-pin Screw Down Plug-in Connector (Right 3 Pins)
- B** **Relay** Dry contacts (normally open/normally closed) to control devices requiring basic on/off operation.
Max: 30V DC 1A.
- C** **Input Power** 5V DC 1.2A Connect to included power supply.
- D** **Cable Lance** Use with included cable tie to secure power supply connection.

GPIO and Relay Wiring


General Purpose Input/Outputs (GPIO) are binary I/O ports used on Savant® controllers used to trigger an action within the system. Events can be the control of a device, such as turning on an amplifier (output) or detecting a state change for a device (input) to perform a workflow. The left 3 pins of the supplied 6-pin Screw Down Plug-in Connector are used for GPIO connections.

Relays are used when a contact closure (normally open or normally closed) is needed to activate a device. An action such as raising or lowering shades, opening or closing a gate, or sending control signals to an HVAC system are a few examples. The right 3 pins of the supplied 6-pin Screw Down Plug-in Connector are used for Relay connections.



GPIO Pull Down Resistor (PD) Usage

GPIO pins are configured as inputs and are pulled high to 12V while the host is booting up. To make the GPIO signal low during a host reboot and/or a power cycle, attach the GPIO 1 pin to the PD pin. The PD pin is a 1K ohm pull down resistor (to signal ground) which keeps the GPIO output below 0.8V during processor boot times.

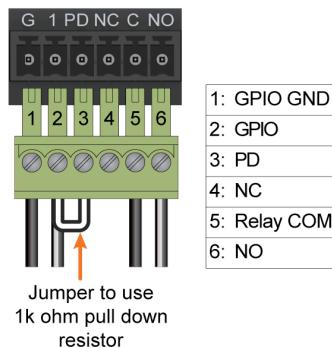

Making Connections

1. Remove Power if power is applied.
2. Pull to remove the terminal block from the rear of the controller.
3. With a small flat bladed screwdriver, turn the screws on the top of connector counterclockwise until the silver crimps in the front of the connector opens enough to slide the wires into the square slots.
4. Insert one of the stripped wires from the devices being controlled into its respective slot in the connector. Refer to the diagrams above.
5. Turn the screw clockwise until the screw tightens around the wire. Tug on the wire a bit to verify it is installed securely. Do not allow more than 1/2 inch of stripped wire exit from the rear of the connector.
6. Repeat for each wire till all wires are installed.
7. Plug terminal blocks back into rear of the controller.
8. Reapply power.

Additional Documentation

Additional Documentation is available on the **Savant Customer Community**.

- SmartControl 2 (SSC-W002G) Deployment Guide - 009-1273-xx
- Relay and General Purpose Input/Output Profiles: Application Note
- Savant Controllers Family video in the Savant University pages

Regulatory

The following statements are applicable to the Savant SmartControl 2 SSC-W002G controller.

FCC Regulations:

15.19. These devices comply with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) These devices may not cause harmful interference, and (2) these devices must accept any interference received, including interferences that may cause undesired operation.

15.21. The changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

15.105. This equipment has been tested and found to comply with the limits for CLASS B digital device, pursuant to Part 15 of FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential environment. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving circuit different from that to which receiver is connected.
- Increase the separation between the equipment and the receiver.
- Consult the dealer or experienced radio/TV technician for help.

IC Regulations:

RSS-Gen 7.1.3. These devices comply with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) These devices may not cause interference, and (2) These devices must accept any interference, including interference that may cause undesired operation of the device.

RSS-21- Annexe 9: A 9.4. Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes: (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.