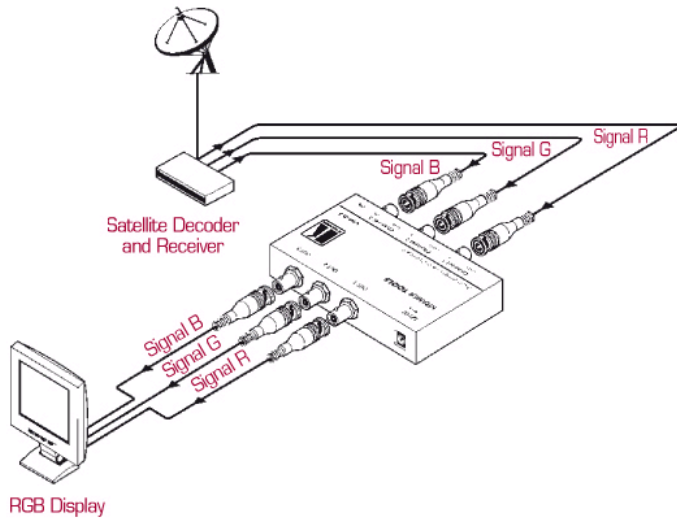


**3 CHANNEL VIDEO CLAMPERS**

The Kramer VM-37 & VM-127 are 3 and 12 channel video clampers for video, s-Video (Y/C) and RGB sources. Many video capture cards, satellite decoders and receivers, and other video and RGB sources ride on erroneous DC offsets that need to be corrected for proper operation.

**DESCRIPTION**

- High Bandwidth - 475MHz (- 3dB).
- Restores to correct DC Levels.
- Level (Gain) and EQ (Peaking) Controls.
- Removes DC Offsets.
- Compact Size (VM-37) - Part of the Kramer TOOLS™ family of compact, high quality and cost effective solutions.

**SPECIFICATIONS**

<b>INPUTS:</b>	3 BNC connectors, 1Vpp / 75Ω; 1 RGB/component video (Y, B-Y, and R-Y), 0.7Vpp / 75Ω on BNC connectors.
<b>OUTPUTS:</b>	3 BNC connectors, 1Vpp / 75Ω; 1 RGB/component video (Y, B-Y, and R-Y), 0.7Vpp / 75Ω on BNC connectors.
<b>MAX. OUTPUT LEVEL:</b>	2.3Vpp.
<b>BANDWIDTH (-3DB):</b>	430MHz.
<b>DIFF. GAIN:</b>	0.35%.
<b>DIFF. PHASE:</b>	0.09.
<b>K-FACTOR:</b>	<0.05%.
<b>S/N RATIO:</b>	74.0 dB.
<b>CROSSTALK (ALL HOSTILE):</b>	-61.8dB.
<b>CONTROLS (GAIN):</b>	-2.1dB to +6.0 dB.
<b>COUPLING:</b>	AC input; DC (clamped) output.
<b>POWER SOURCE:</b>	12V DC 80mA.
<b>DIMENSIONS:</b>	12cm x 7.5cm x 2.5cm (4.7-inch x 2.95-inch x 0.98-inch, W, D, H).
<b>WEIGHT:</b>	0.3 kg (0.67 lbs.) approx.
<b>ACCESSORIES:</b>	Power adapter.